



# FIVE WAY SINGLE ACTUATOR AIR OPERATED VALVE




# M04

## DESCRIPTION

### Mechanical Characteristics:

Five Way Two Position Single Actuator Monostable Air Operated Valve. Suitable for gaseous media. Model for liquid media available upon request. Forged Brass, Nickel Plated Brass or Stainless Steel body. Stainless Steel internal moving parts. Stainless Steel springs. Valve will operate in any position.

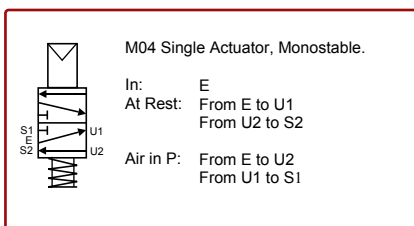


## PNEUMATIC ACTUATOR INFORMATION

Simple effect actuator with pneumatic spring return. Brass or Nickel Plated Brass Actuator.

### SPECIFICATION:

Minimum Operating Pressure:	2 Bar.
Maximum Operating Pressure:	10 Bar.

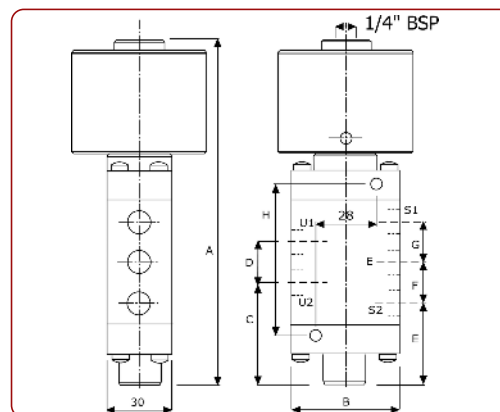

## SPECIFICATIONS & DIMENSIONS

Model	Dimensions					Orifice MM	Nominal Max.	Pressure in Bar		Flow Factor KV (L/Min.)	Weight Kg.	Dimensions MM							
	A	B	C	D	E			Differential				A	B	C	D	E	F	G	H
								Min.	Max.										
M04	70	C	1/4"			7.0	10	0	10	12.5	1.5	115	50	42	18	33	18	18	67

## ORDER CODES

A	Body	B	Port	C	Seals (fluid temp. min / max)		
T	Brass	C	1/4" BSP	D	1/4" NPT	0	NBR (-10°C to + 70°C)
N	Nickel Plated Brass					1	VITON (-10°C to + 90°C)
I	316 Stainless Steel					7	HNBR (-45°C to + 90°C)